



**CERTIFICATION FOR TRANSLATION**

**RECEIVED**

AUG 10 2004

Technology Center 2600

As a below named translator, I hereby declare that:

My residence and citizenship are as stated below next to my name.

I hereby certify that I am conversant with both the English and Korean languages and the document enclosed herewith is true English translation of the priority document with respect to the Korean Patent Application No. 1999-27166 filed on July 7, 1999.

**NAME OF THE TRANSLATOR : Joo-Hee CHOI**

**SIGNATURE :** Joo-Hee Choi

**Date :** July 14, 2004

**RESIDENCE :** MIHWA BLDG., 110-2, MYONGRYUN-DONG 4-GA, CHONGRO-GU, SEOUL 110-524, KOREA

**CITIZENSHIP :** REPUBLIC OF KOREA



RECEIVED

AUG 10 2004

Technology Center 2600

[ABSTRACT OF THE DISCLOSURE]

[ABSTRACT]

Disclosed is a channel communication method in a CDMA  
5 communication system. The channel communication method comprises the steps  
of: transmitting a preamble through which a mobile station accesses a base  
station; allocating in response to the preamble a control channel receiver for  
receiving channel allocation information and power control information  
transmitted from the base station, and an uplink common channel transmitter for  
10 transmitting a message; and transmitting a message through the uplink common  
channel transmitter, and controlling transmission power of the uplink common  
channel transmitter according to the power control information received from the  
control channel receiver.

15 [REPRESENTATIVE FIGURE]

FIG. 3

[INDEX]

Common Packet Channel, Collision Detection Preamble, Channel  
20 Allocation AICH, Collision Detection AICH, Signature



Appln. No. 99-27166

**RECEIVED**

AUG 10 2004

Technology Center 2600

**[SPECIFICATION]**

**[TITLE OF THE INVENTION]**

APPARATUS AND METHOD FOR COMMUNICATING A PACKET  
5 USING A COMMON CHANNEL IN A CDMA COMMUNICATION SYSTEM

**[BRIEF DESCRIPTION OF THE DRAWINGS]**

FIG. 1 is a diagram illustrating structures of uplink and downlink common  
10 channels in a CDMA communication system.

FIG. 2 is a diagram illustrating structures of uplink and downlink common  
channels in a conventional CDMA communication system.

FIG. 3 is a diagram illustrating structures of uplink and downlink common  
channels in a CDMA communication system, according to an embodiment of the  
15 present invention.

FIG. 4 is a diagram illustrating a structure of the preamble shown in FIG. 3.

FIG. 5a is a diagram illustrating a structure of an AICH (Access preamble-  
acquisition Indicator Channel) frame according to an embodiment of the present  
invention, and FIG. 5b is a diagram illustrating a structure of an AICH generator for  
20 generating an AICH signal.

FIGS. 6a and 6b are diagrams illustrating a channel allocation AICH  
according to an embodiment of the present invention, and a scheme for generating  
the same.

FIG. 7 is a diagram illustrating a structure of a mobile station transmitting a  
25 message over a common channel in a CDMA communication system, according to  
an embodiment of the present invention.

FIG. 8 is a diagram illustrating a structure of a base station transmitting a  
message over a common channel in a CDMA communication system, according to  
an embodiment of the present invention.

30 FIG. 9 is a diagram illustrating a scheme for designating a channel by  
combining a CD (Collision Detection)\_AICH with a CA (Channel  
Allocation)\_AICH, according to another embodiment of the present invention.

FIG. 10 is a diagram illustrating another structure of an uplink and downlink

common channel in a CDMA communication system, according to an embodiment of the present invention.

FIG. 11 is a diagram illustrating a scheme for generating a CD/CA\_AICH signal in FIG. 10.

5

**[DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT]**

**[OBJECT OF THE INVENTION]**

**[RELATED FIELD AND PRIOR ART OF THE INVENTION]**

10       The present invention relates generally to a common channel communication apparatus and method for a CDMA communication system, and in particular, to an apparatus and method for communicating data over a common channel in an asynchronous CDMA communication system.

15       An asynchronous CDMA communication system, such as the UMTS (Universal Mobile Telecommunications System) W-CDMA (Wideband Code Division Multiple Access) communication system, which is a future mobile communication system, uses a random access channel (RACH) for an uplink (or reverse) common channel.

20

FIG. 1 is a diagram illustrating a communication structure of a conventional asynchronous uplink common channel. In FIG. 1, reference numeral 151 indicates a structure of an uplink channel, which can be the RACH. Further, reference numeral 111 indicates an operation of an access preamble-acquisition indicator channel (AICH), which is a downlink (or forward) channel.

25

Referring to FIG. 1, a mobile station transmits a preamble 162 of specific length using the RACH and then awaits a response from a base station. Upon detecting the preamble transmitted over the RACH, the base station transmits a signature 122 of the detected preamble over the downlink AICH. The mobile station then monitors an AICH corresponding to the transmitted preamble. If the mobile station receives the AICH signal, it demodulates the signature 122. In this case, if the signature corresponding to the preamble transmitted over the RACH is detected

30

through the AICH signal, the mobile station judges that the base station has detected the preamble, and transmits a message over the uplink access channel.

Otherwise, upon failure to detect an AICH signal transmitted from the base station within a set time  $T_{p-AI}$  after transmission of the preamble 162, the mobile station judges that the base station has failed to detect a preamble, and retransmits the preamble after a lapse of a preset time. As represented by reference numeral 164, the mobile station retransmits the preamble at transmission power increased by  $\Delta P$  (dB) from the transmission power at which the preamble was previously transmitted.

10 Upon failure to receive the AICH signal transmitted from the base station after transmission of the preamble, the mobile station changes, after a lapse of a set time, the transmission power of the preamble and repeatedly performs the above operation. If the AICH signal is received during the process of transmitting the preamble, the mobile station transmits, after a lapse of a preset time, an uplink common channel

15 message 170.

As described above, by transmitting the preamble using the RACH, it is possible for the base station to efficiently detect the preamble and to readily set the initial power of the uplink common channel message. However, since the RACH is

20 not power controlled, it is difficult to transmit packet data, which has a large amount of transmission data and a long transmission time.

To solve this problem, a method for power controlling the uplink common channel has been proposed for the W-CDMA system. This method is applied to a

25 common packet channel (CPCH). The CPCH enables power control of the uplink common channel. Accordingly, the CPCH enables the mobile station to transmit a data channel of a high rate for a predetermined time (from one to five hundreds of ms). Further, the CPCH enables the mobile station to rapidly transmit a message, which is smaller in size than a specific value, to the base station using the uplink

30 common channel, without using a dedicated channel. That is, in order to establish the dedicated channel, many related control messages are exchanged between the mobile station and the base station. Therefore, exchanging many control messages in transmitting data of a comparatively small size of several tens to several hundreds of

ms, becomes a needlessly large amount of overhead. Thus, it is more effective to use the CPCH, when transmitting data of a small size.

However, since plural mobile stations share the common packet channel, a collision phenomenon between uplink channels should be prevented as far as possible. FIG. 2 shows a signal transmission procedure of the downlink and uplink channel signals according to the prior art. In FIG. 2, a collision detection preamble (CD\_P) is used to prevent a collision between uplink channel signals.

Referring to FIG. 2, a mobile station transmits access preambles 262 and 264 to a base station according to the procedure shown in FIG. 1. Upon detection of the access preamble 264, the base station transmits to the mobile station an AICH signal as shown in reference numeral 222. Then, the mobile station receives to demodulate the AICH signal. In this case, it may be judged that the base station has detected a preamble of the mobile station itself, but it may also be judged that the base station has transmitted an ACK signal in response to the same preamble that was transmitted by another mobile station at a similar time to the time when the above mobile station transmitted the preamble. In short, the mobile station cannot determine precisely whether the base station has actually detected the same preamble that the mobile station itself transmitted. Consequently, it may happen that two or more mobile stations simultaneously transmit a message over the same channel, judging that the base station has received an access preamble transmitted by the mobile stations themselves.

In order to avoid this collision probability, the mobile station transmits a CD preamble 266 to the base station after receiving over the AICH an ACK to the access preamble. That is, after receiving an AICH signal from the base station, the mobile station randomly selects a CD preamble to transmit the selected collision detection preamble to the base station. Upon receipt of the CD preamble after transmission of the AICH signal, the base station transmits a response signal for the CD preamble to the mobile station over another CD\_AICH. In this case, if the number of CD preambles to be able to be selected by the mobile station is 16, a probability of a collision between two mobile stations can be decreased by 1/16.

If the mobile station receives from the base station over the CD\_AICH an ACK for the CD preamble, it transmits a message to the base station over a CPCH after a lapse of a given time. The CPCH is comprised of power control data and information data, which can transmit a signal of a high data rate over a given time (from several tens to several hundreds of ms), performing power control with one uplink common channel. At the same time, the base station allocates a downlink DPCCH(Dedicated Physical Control Channel) to transmit a power control command to the mobile station as represented by reference numeral 230, and the mobile station outputs the power control command through a CPCH.

As stated above, when transmitting the message over the CPCH, the base station should allocate a downlink channel for power control of the CPCH. In FIG. 2, the downlink channel is assumed to be a DPCCH. Further, the base station should allocate an uplink common packet channel over which the mobile station transmits a message. That is, when allocating the downlink channel for the uplink common packet channel, the base station can allocate a specific downlink channel according to the access preamble or the CD preamble transmitted from the mobile station. In this case, what a base station that manages system resources can judge and control may be inefficient in allocating a channel.

In a method illustrated in FIG. 2, an uplink common channel or a common packet channel is set to be power-controlled for its efficiency, and a CD preamble and an ACK transmitted over a CD\_AICH is used so as to decrease a collision of uplink signals. However, in order to efficiently use the common packet channel, downlink and uplink channels should be properly allocated.

#### **[SUBSTANTIAL MATTER OF THE INVENTION]**

It is, therefore, an object of the present invention to provide an apparatus and method for transmitting a message over a common channel in a CDMA communication system.

It is another object of the present invention to provide a channel allocation method for performing efficient power control on an uplink common channel for transmitting a message over a common channel in a CDMA communication system.

- 5           It is still another object of the present invention to provide a device and method for allocating a channel so as to transmit a message over an uplink common channel in an asynchronous CDMA communication system.

10           In an embodiment of the present invention, there is provided a channel communication method of a mobile station that transmits a message over a common channel in a CDMA communication system. The channel communication method comprises the steps of: transmitting a preamble through which the mobile station accesses a base station; allocating in response to the preamble a control channel receiver for receiving channel allocation information and power control information  
15           transmitted from the base station, and an uplink common channel transmitter for transmitting a message; and transmitting a message through the uplink common channel transmitter, and controlling transmission power of the uplink common channel transmitter according to the power control information received from the control channel receiver.

20

          In another embodiment of the present invention, there is provided a channel communication method of a base station that transmits a message over a common channel in a CDMA communication system. The channel communication method comprises the steps of: when detecting a preamble transmitted from a mobile station,  
25           generating and transmitting a channel allocation message in response to the preamble; based on the channel allocation message, allocating a downlink control channel for transmitting power control information for controlling transmission power of the mobile station and an uplink common channel for receiving a message transmitted from the mobile station; and receiving a message transmitted over the  
30           uplink common channel, generating power control information by measuring a signal of the mobile station and transmitting the generated power control information over the downlink control channel.



## [CONSTRUCTION AND OPERATION OF THE INVENTION]

Preferred embodiments of the present invention will be described herein below with reference to the accompanying drawings.

5

In a CDMA communication system according to the preferred embodiments of the present invention, in order to transmit a message to the base station over the uplink common channel, the mobile station first transmits a preamble to the base station. Then, after receiving and responding to this preamble, the base station  
10 allocates to the mobile station a downlink channel used for controlling transmission power of the uplink common channel used by the mobile station. In this case, after transmitting the preamble to the base station, the mobile station receives a channel allocation message from the base station, transmits a message to the base station over an allocated channel, and additionally controls the transmission power of the  
15 uplink common channel according to a power control command received over an allocated downlink channel.

In the above description, it is assumed that the preamble transmitted from the mobile station may be an access preamble (AP) or a collision detection preamble  
20 (CD\_P), and that the base station generates an AP\_AICH and a CD\_AICH in response to the AP and the CDP, respectively, and generates a CA\_AICH for allocating the above-stated channel after transmitting the CD\_AICH.

FIG. 3 shows a signal flow between the mobile station and the base station  
25 to establish an uplink common packet channel (CPCH) or an uplink common channel proposed in the preferred embodiments of the present invention. In the preferred embodiments of the present invention, it will be assumed that an uplink common packet channel is used for the uplink common channel. However, a different common channel other than the uplink common packet channel can also be  
30 used for the uplink common channel.

Referring to FIG. 3, the mobile station, after time synchronization with the downlink through a downlink broadcasting channel, acquires information related to

the uplink common channel or the CPCH. The uplink common channel-related information includes information about the number of spreading codes and signatures used for an access preamble, and AICH timing of the downlink. When the mobile station attempts to transmit a signal over the CPCH, the mobile station first  
 5 transmits an AP as represented by reference numeral 362. The AP is spread with a unique spreading code of the mobile station, and the spread AP is multiplied by a signature.

In the preferred embodiments of the present invention, one bit of the  
 10 signature is maintained during a 256-chip period, and the 256-chip period is spread with a designated spreading code of each base station. FIG. 4a illustrates a structure of the preamble.

Referring to FIG. 4a, for the spreading code, a sequence of length 256 can be  
 15 used, and a long code that is not repeated for a length of a preamble can also be used. In the W-CDMA communication system, an uplink common channel can be divided into an RACH and a CPCH by using different spreading codes (a spreading code for the RACH and another spreading code for the CPCH). In addition, although the same spreading code is used in the W-CDMA communication system, the uplink  
 20 common channel can be divided into the RACH and the CPCH by using different signatures (a signature for the RACH and another signature for the CPCH).

When the mobile station attempts to transmit data to the base station over the CPCH, the mobile station, after time synchronization with the base station,  
 25 transmits the AP to the base station at initial power  $P_0$  as represented by reference numeral 362. When detecting the AP of power  $P_0$ , the base station transmits to the mobile station an ACK signal over an AICH corresponding to the AP. In this case, if the uplink capacity of the base station exceeds a predetermined value or there is no more demodulator, the base station transmits a NAK signal to temporarily  
 30 discontinue mobile station's transmitting the uplink common channel.

In addition, when the base station fails to detect the AP, the base station cannot send an ACK signal to the AICH such as reference numeral 322. Therefore,

in the embodiment of the present invention, it will be assumed that nothing is transmitted to the AICH.

Therefore, after transmission of the AP over an uplink RACH, the mobile station monitors a downlink AICH. At this time, the mobile station demodulates an AICH corresponding to the transmitted AP. If the mobile station fails to receive an AP\_AICH from the base station because the base station did not transmit any signal, the mobile station retransmits to the base station the AP at power  $P_1 (= P_0 + \Delta P)$  after a given time (tp-p) as represented by reference numeral 364. If the base station transmitted a NAK signal to the mobile station, the mobile station discontinues transmission of an uplink CPCH for a given time and then re-attempts the transmission of the uplink CPCH. Here, the given time can be set to 'tp-p' or other values. However, when detecting the AP, the base station transmits an ACK signal to the mobile station over an AP\_AICH as represented by reference numeral 322. At this time, if the mobile station succeeds in receiving the ACK signal over the AP\_AICH, the mobile station judges that the base station has acquired a mobile station's signal and proceeds to the next step.

If the mobile station receives the ACK signal over the AP\_AICH, the mobile station transmits a CD preamble to the base station over the uplink. There may be several CD preambles, and the mobile station randomly selects to transmit one of the several CD preambles. In the preferred embodiments, it will be assumed that the CD preamble is transmitted using a spreading code different from that of the AP, and that the two spreading codes are discriminated from each other through signatures. In this case, although a collision phenomenon occurred because two or more mobile stations simultaneously transmitted the AP, a probability that the mobile stations select the same CD preamble can be decreased. That is, if there are a number ( $N_2$ ) of CD preambles, a collision probability decreases to  $1/N_2$ .

As stated above, if the mobile station transmits a CD preamble to the base station, the base station detects and demodulates the CD preamble. At this time, if the base station detects the CD preamble, the base station transmits a response signal corresponding to the CD preamble over the downlink, as represented by reference

numeral 324. The above response signal of the base station is referred to as a 'CD\_AICH'. The CD\_AICH informs the mobile station of acquisition of the mobile station's signal by transmitting a signature of the CD preamble over the downlink, as the AP\_AICH does. Here, the CD\_AICH can be spread using a different orthogonal  
5 channelization code from that of the AP\_AICH. Therefore, the CD\_AICH and the AP\_AICH can be transmitted over different physical channels, or can be transmitted over the same physical channel by time dividing one orthogonal channel.

In the preferred embodiments of the present invention, the CD\_AICH is  
10 transmitted over a different physical channel from that of the AP\_AICH. That is, the CD\_AICH and the AP\_AICH are spread with an orthogonal spreading code of length 256 and transmitted over independent physical channels. In this case, the mobile station can transmit a CPCH at a decreased collision probability by ascertaining the CD\_AICH.

15

After transmitting the CD\_AICH as represented by reference numeral 324, the base station transmits to the mobile station a channel allocation command over a CA\_AICH after a lapse of a given delay time ( $t_{cd-ca}$ ). The channel allocation command transmitted through the CA\_AICH includes allocation information of a  
20 downlink channel allocated for power control of the CPCH. The downlink allocated to power control the CPCH is available in several methods.

First, a downlink shared power control channel is used. A method for controlling transmission power of a channel using the shared power control channel  
25 is disclosed in detail in Korean patent application No. 1998-10394, the contents of which are hereby incorporated by reference. Further, it is possible to transmit a power control command for the CPCH by using the shared power control channel. Allocating the downlink channel may include information about the channel number and the time slot for the downlink shared power control used for power control.

30

Second, a downlink control channel can be used which is time-divided into a message and a power control command. In the W-CDMA system, this channel is defined to control the downlink shared channel. Even when the data and the power

control command is time divided for transmission, the channel information includes the information about the channel number and the time slot of the downlink control channel.

5           Third, one downlink channel can be allocated to control the CPCH. The power control command and the control command can be transmitted together over this channel. In this case, the channel information becomes a channel number of the downlink channel.

10           In the preferred embodiments of the present invention, the channel allocation command transmitted over the CA\_AICH is transmitted after a given time  $t_{cd-ca}$  from the transmission of the CD\_AICH. The given time  $t_{cd-ca}$  can also be set to 0. Further, it will be assumed that in order to decrease the delay in processing a message from an upper layer, a channel allocation command transmitted over the  
15 CA\_AICH is transmitted in the same format as the CD\_AICH. In this case, if there exist 16 signatures and 16 CPCHs, each CPCH will correspond to a unique one of the signatures. For example, when the base station desires to allocate a 5<sup>th</sup> CPCH for transmitting a message to the mobile station, the base station transmits a 5<sup>th</sup> signature corresponding to the 5<sup>th</sup> CPCH in the channel allocation command.

20           In the above description, it is assumed that two frames of the CA\_AICH frame over which the channel allocation command is transmitted has a length of 20ms and includes 15 slots and each slot is comprised of 20 symbols. The frame for transmitting the preamble (AP and CE preamble) is comprised of 15 slots and each  
25 slot can be comprised of 20 symbols. It will be assumed that one symbol period (or duration) has a length of 256 chips and the AICH is transmitted in only a 16-symbol period.

          Therefore, the channel allocation command transmitted as shown in FIG. 3  
30 can be comprised of 16 symbols, and each symbol has a length of 256 chips. Further, each symbol is multiplied by the 1-bit signature and the spreading code and then transmitted over the downlink, and an orthogonal property (or orthogonality) is guaranteed between the signatures.

FIG. 5a illustrates a frame structure of an AICH. As illustrated in FIG. 51, one frame of the AICH is comprised of 15 slots, each of which can transmit 0 or more than 1 of the 16 signatures.

5

FIG. 5b illustrates an AICH generator for generating a CA\_AICH allocation command. As stated above, each slot of the AICH frame allocates a corresponding signature out of the 16 signatures. Referring to FIG. 5b, multipliers 501-516 receive corresponding signatures (orthogonal codes  $W_1$ - $W_{16}$ ) as a first input and receive acquisition indicators  $AI_1$ - $AI_{16}$  as a second input, respectively. Therefore, the multipliers 501-516 multiply the corresponding orthogonal code by the corresponding acquisition indicator  $AI$ , respectively, and a summer 520 sums up the outputs of the multipliers 501-516 and outputs the resulting value as an AICH signal.

15 The base station can transmit the channel allocation command using the AICH generator in several methods that are given below by way of example.

For a first method, one downlink channel is allocated to transmit the channel allocation command over the allocated channel. Transmitting the channel allocation command through the first method is referred to as a CA\_AICH. FIG. 6a shows a first exemplary CA\_AICH. Reference numeral 611 in FIG. 6a illustrates a transmission frame structure of the CD\_AICH for transmitting a response signal for the CD preamble, and reference numeral 613 illustrates a structure of a frame for transmitting the channel allocation command over the CA\_AICH after a lapse of a delay time  $t_{cd-ca}$  from the transmission of the CD\_AICH

For a second method, the CA\_AICH can be transmitted by time dividing slots of the AP\_AICH or CD\_AICH. FIG. 6a illustrates an exemplary scheme for time dividing and allocating the CD\_AICH and the CA\_AICH to each slot prior to transmit the allocated AICHs. In the second method, some slots of the AP\_AICH and the CD\_AICH are used for channel allocation, not for an original use of the AP or the CD preamble.

It is also important to allocate channels used in an uplink common control channel.

First, the easiest method for allocating the uplink common channel is to  
 5 allocate a downlink control channel over which the base station transmits power  
 control information and an uplink common control channel over which the mobile  
 station transmits a message, on a one-to-one basis. When the downlink control  
 channel and the uplink common control channel are allocated on a one-to-one basis,  
 it is possible to allocate the downlink control channel and the uplink common  
 10 control channel by transmitting a command only once without a separate message.  
 That is, this channel allocation method is applied when the CA\_AICH designates the  
 channels used for both the downlink and the uplink.

A second method maps the uplink channel to the function of the signatures  
 15 for the AP, the slot number of the access channel and the signatures for the CD\_P,  
 transmitted from the mobile station. For example, the uplink common channel is  
 associated with an uplink channel corresponding to a slot number at a time point  
 when the signature for the CD\_P and its preamble are transmitted. That is, in this  
 channel allocation method, the CD\_AICH allocates the channel used for the uplink,  
 20 and the CA\_AICH allocates the channel used for the downlink. If the base station  
 allocates the downlink channel in this method, it is possible to maximally utilize the  
 resources of the base station, thereby increasing utilization efficiency of the channels.

FIG. 7 shows a structure of the mobile station for communicating a message  
 25 over an uplink common channel according to an embodiment of the present  
 invention.

Referring to FIG. 7, an AICH demodulator 711 demodulates AICH signals  
 on the downlink transmitted from the AICH generator of the base station, according  
 30 to control operation of the controller 720. The AICH demodulator 711 may include  
 an AP\_AICH demodulator, a CD\_AICH demodulator and a CA\_AICH demodulator.  
 In this case, the controller 720 designates the channels of the respective  
 demodulators to enable them to receive AP\_AICH, CD\_AICH and CA\_AICH,

respectively, transmitted from the base station. The AP\_AICH, CD\_AICH and CA\_AICH can be implemented through either one demodulator or separate demodulators. In this case, the controller 720 can designate the channels by allocating the slots to receive the time-divided AICHs.

5

A data and control signal processor 713 designates a channel under the control of the controller 720, and processes data or a control signal (including a power control command) received over the designated channel. A channel estimator 715 estimates strength of a signal received from the base station over the downlink, and controls phase compensation and gain of the data and control signal processor 713 to assist demodulation.

The controller 720 controls the overall operation of a downlink channel receiver and an uplink channel transmitter of the mobile station. In this embodiment of the present invention, the controller 720 controls generation of the access preamble AP and the collision detection preamble CD\_P while accessing the base station, and processes the AICH signals transmitted from the base station. That is, the controller 720 controls the preamble generator 731 to generate the access preamble AP and the collision detection preamble CD\_P as shown by 351 of FIG. 3, and controls the AICH demodulator 711 to process the AICH signals generated as shown by 311 of FIG. 3.

The preamble generator 731, under the control of the controller 720, generates the preambles preamble and CD\_P as shown by 351 of FIG. 3. A frame formatter 733 formats frame data by receiving the preambles preamble and CD\_P output from the preamble generator 731, and the packet data and pilot signals on the uplink. The frame formatter 733 controls transmission power of the uplink according to the power control signal outputted from the controller 720. In the preferred embodiment of the present invention, a channel outputting the encoded packet data may be an uplink CPCH. In this case, it is also possible to transmit a power control command for controlling transmission power of the downlink over the uplink.

FIG. 8 shows a transceiver of the base station for communicating a message



over an uplink CPCH according to an embodiment of the present invention.

Referring to FIG. 8, an AICH detector 811 detects the preamble and the CD\_P shown by 331 of FIG. 3, transmitted from the mobile station, and provides the  
5 detected preamble and CD\_P to the controller 820. A data and control signal processor 813 designates a channel under the control of the controller 820, and processes data or a control signal received over the designated channel. A channel estimator 815 estimates strength of a signal received from the mobile station over the downlink, and controls a gain of the data and control signal processor 813.

10

The controller 820 controls the overall operation of a downlink channel transmitter and an uplink channel receiver of the base station. The controller 820 controls detection of the access preamble AP and the collision detection preamble CD\_P generated when the mobile station accesses the base station, and controls  
15 generation of the AICH signals for responding to the preamble and CD\_P and commanding channel allocation. That is, the controller 820 controls the AICH generator 831 using an AICH generation control command 826 to generate the AICH signals shown by 311 of FIG. 3, upon detecting the access preamble AP and the collision detection preamble CD\_P received through the preamble detector 811  
20 as shown by 351 of FIG. 3.

The AICH generator 831, under the control of the controller 820, generates AP\_AICH, CD\_AICH and CA\_AICH that are response signals to the preamble signals. The AICH generator 831 may include an AP\_AICH generator, a CD\_AICH  
25 generator and a CA\_AICH generator. In this case, the controller 820 designates the generators so as to generate the AP\_AICH, CD\_AICH and CA\_AICH shown by 311 of FIG. 3, respectively. The AP\_AICH, CD\_AICH and CA\_AICH can be implemented by either one generator or separate generators. In this case, the controller 820 can allocate the time-divided slots of the AICH frame so as to  
30 transmit the AP\_AICH, CD\_AICH and CA\_AICH.

A frame formatter 833 formats frame data by receiving the AP\_AICH, CD\_AICH and CA\_AICH output from the AICH generator 831, and the downlink

control signals, and controls transmission power of the uplink according to the power control command 824 outputted from the controller 820. Further, when a downlink power control command 832 is received over the uplink, the frame formatter 833 may control transmission power of a downlink channel for controlling  
5 the common packet channel according to the power control command.

In the above embodiment of the present invention, only one CPCH can be allocated to one slot. That is, although signatures allocating the respective channels of the CA\_AICH are orthogonal to one another, the mobile station cannot know  
10 which signature it has received. To solve this problem, a new signature structure can be used, in which plural CPCHs can be allocated to one slot. In this structure, the base station transmits CA\_AICH information to the mobile station while transmitting the CD\_AICH.

15 In an embodiment of the present invention, it is assumed that the CA\_AICH allocates two CPCHs to the CD\_AICH at one time. When transmitting the CD\_AICH, the base station multiplies the CD\_AICH by one of +1, 0 and -1. More specifically, the base station multiplies the CD\_AICH by 0 when it has not detected a CD preamble of the mobile station, and the base station multiplies the CD\_AICH  
20 by +1 or -1 when it has detected the CD preamble of the mobile station.

The information +1/-1 can be used for designating the CA\_AICH. That is, while multiplying the CD\_AICH by +1 before transmission, the base station multiplies the CA\_AICH of a corresponding mobile station by +1 prior to  
25 transmission. Similarly, while multiplying the CD\_AICH by -1 before transmission, the base station multiplies the CA\_AICH of the corresponding mobile station by -1 prior to transmission. Then, the mobile station detects a pattern at which the base station multiplies the CD\_AICH by +1/-1, and selects and uses a channel corresponding to the detected pattern, out of channels determined according to a  
30 channel allocation command transmitted over the CA\_AICH. That is, if the mobile station has detected a pattern of -1 from the CD\_AICH, it receives a channel multiplied by -1, out of the channels determined according to a channel allocation command transmitted over the CA\_AICH. Otherwise, if the mobile station has

detected a pattern of +1 from the CD\_AICH, it receives a channel multiplied by +1. In this manner, two channels can be simultaneously allocated to one AICH.

In addition, information +1/-1 of the CD\_AICH can also be used for channel allocation. FIG. 9 illustrates an exemplary scheme for using the information +1/-1 of the CD\_AICH for channel allocation. In FIG. 9, it is assumed that 8 CPCHs can be simultaneously transmitted. However, the number of CPCHs that can be simultaneously transmitted may be varied according to circumstances.

Referring to FIG. 9, 8 downlink control channels are divided into two groups A and B as represented by reference numerals 911 and 913. If the CD\_AICH is multiplied by +1 before transmission, one of four channels in a group A is selected as a downlink control channel. If the CD\_AICH is multiplied by -1 before transmission, one of four channels in a group B is selected as a downlink control channel. A channel allocation method shown in FIG. 9 can reduce by half the length of the CA\_AICH that can transmit a channel allocation command through orthogonal signatures. Here, the channel number of the CPCH can be designated in one-to-one correspondence with a downlink channel so that designation of the downlink channel results in designation of an uplink channel, or can be designated through a function of an AP, a CD\_P and an access slot number. In addition, the number of CPCHs and the symbol length of the CA\_AICH are respectively set to '8' and '4 bits', so that the CA\_AICH and the CD\_AICH shown in FIG. 6 can be used through a time division technique.

In the preferred embodiments of the present invention, by transmitting the CA\_AICH after transmission of the CD\_AICH or simultaneously transmitting the CA\_AICH and the CD\_AICH, a collision probability of the uplink CPCH can be decreased and the channel allocation can be efficiently performed. However, in the above two method, the CD\_AICH and the CA\_AICH are separately transmitted.

FIG. 10 illustrates a scheme for collectively transmitting a CD\_AICH and a CA\_AICH through one AICH. That is, when detecting a CD\_P transmitted from the mobile station, the base station transmits one signature over a downlink AICH by

combining CD\_AICH information and CA\_AICH information. In FIG. 10, an AICH that the base station transmits to the mobile station when detecting the CD\_P is called a CD/CA\_AICH. FIG. 10 shows a method of transmitting the CD/CA\_AICH from the base station to the mobile station when the base station detects the CD\_P.

5 In this case, the CD\_AICH and the CA\_AICH are collectively transmitted through one signature.

The signature of the CD/CA\_AICH shown in FIG. 10 can be generated from a CD/CA\_AICH generator shown in FIG. 11.

10

Referring to FIG. 11, the base station generates one signature by combining the detected CD\_P signature with the CA information. In the preferred embodiments of the present invention, it is assumed that 16 CD signatures and 16 CPCHs are available. Therefore, 256 information combinations are available, which can be

15 regarded as 8-bit information. A signature encoder 1111 receives the 8-bit information and generates a signature of a 16-symbol length. A multiplexer (MUX) 1113 multiplexes CD/CA signatures corresponding to the respective slots generated from the signature encoder 1111. A multiplier 1113 spreads the output of the MUX 1113 with an orthogonal code  $W_{cd/ca}$  allocated to the CD/CA\_AICH. A multiplier

20 1117 re-spreads the orthogonally-spread signal from the multiplier 1113 with a downlink spreading code to transmit the re-spread signal over the downlink.

At this time, the mobile station receives the CD/CA\_AICH to perform a test on the signature corresponding to the CD\_P transmitted by the mobile station itself.

25 Here, although the number of signatures that the base station can transmit is 256, the mobile station does not need to perform detection on all the signatures because it already knows the expected value of the CD. That is, the mobile station only needs to detect 16 signatures corresponding to the CD\_P transmitted by the mobile station itself. Then, upon detection of the CD and a channel allocation command, the

30 mobile station transmits an uplink CPCH after a lapse of given time using a designated channel.

In the above method, the base station collectively allocates CPCH-related

resources such as a downlink control channel and a common packet channel. A description will be made of another embodiment for performing channel allocation as stated above. In this embodiment, the mobile station transmits an AP, and the base station transmits an AP\_AICH as in the above method. However, a CD\_P that the mobile station can transmit is allocated to two channels. That is, two downlink control channels can be allocated to each CD\_P. Here, an uplink CPCH can correspond to the downlink control channel on a one-to-one basis.

Referring to the above embodiment, if the mobile station has transmitted a CP\_P, it can be known in advance that the mobile station uses one of two channels allocated to the CD\_P. Similarly, when detecting the CD\_P, the base station can know which channel the mobile station will use. That is, the mobile station can use one of the two channels corresponding to the CD\_P.

At this time, the base station judges which of the two channels is available, and can allocate a channel to the CD\_AICH using information of +1/-1. Here, "+1" indicates a first channel of the two channels, and "-1" indicates a second channel of the two channels. If the two channels are all available, the base station transmits a random one of "+1/-1". However, if only one of the two channels is available, the base station transmits a CD\_AICH multiplied by +1/-1 information corresponding to the available channel. If the two channels are all unavailable, the base station transmits a CD\_AICH multiplied by 0. This means that the base station has not transmitted any signal.

Then, the mobile station detects the CD\_AICH to transmit a CPCH over a channel corresponding to +1/-1. Upon failure to detect the CD\_AICH, the mobile station judges that the base station has failed to detect a CD or there is no available channel, and retries to transmit the CPCH after a lapse of a given time.

### 30 [EFFECTS OF THE INVENTION]

As described above, the conventional CPCH is designed on the assumption that a mobile station selects a random signature and uses a CPCH corresponding to

the selected signature. However, this method cannot efficiently manage CPCH-related resources. To solve this problem, the preferred embodiment of the present invention proposes a method for collectively managing and allocating, in a base station, the CPCH-related resources. Consequently, the CPCH-related resources can  
5 be efficiently used through a channel allocation scheme according to the preferred embodiments of the present invention.

**[PATENT CLAIMS]**

1. A channel communication apparatus of a mobile station in a CDMA (Code Division Multiple Access) communication system, the apparatus comprising:  
5 a first uplink common channel transmitter for transmitting a preamble used for accessing a base station;  
a downlink common channel receiver for receiving channel allocation information in response to the preamble;  
a downlink control channel receiver for receiving power control information  
10 transmitted from the base station, a channel for the downlink control channel receiver being designated by the channel allocation information; and  
a second uplink common channel transmitter for transmitting a message at a transmission power level determined by the power control information received by the downlink control receiver, a channel for the second uplink common channel  
15 transmitter being designated by the channel allocation information.
2. The apparatus as claimed in claim 1, wherein the first uplink common channel transmitter is a random access channel transmitter that transmits an access preamble (AP) when accessing the base station and transmits a collision  
20 detection preamble (CD\_P) when receiving a response signal for the AP from the base station.
3. The apparatus as claimed in claim 2, wherein different spreading  
25 codes are used for the AP and the CD\_P.
4. The apparatus as claimed in claim 2, wherein different signatures are used for the AP and the CD\_P.
5. The apparatus as claimed in claim 1 or 2, wherein the common  
30 channel receiver receives a response signal for the AP from the base station and receives channel allocation information and a response signal for the CD\_P.
6. The apparatus as claimed in claim 1, wherein the downlink control

channel receiver is a downlink dedicated control channel receiver.

7. The apparatus as claimed in claim 1, wherein the downlink control channel receiver is a common power control channel receiver.

5

8. The apparatus as claimed in claim 1, wherein the downlink control channel receiver uses a downlink shared channel which is time-divided into a message and a power control command.

10 9. The apparatus as claimed in claim 1, wherein the second uplink common channel transmitter is a common packet channel transmitter.

10. A channel communication apparatus of a mobile station in a CDMA communication system, the apparatus comprising:

15 a first uplink common channel transmitter for transmitting an AP used for accessing a base station;

a first common channel receiver for receiving a first response signal for the AP from the base station;

20 a second common channel transmitter for transmitting a CD\_P when receiving the first response signal from the first uplink common channel transmitter;

a second common channel receiver for receiving a response signal for the CD\_P from the base station;

a third common channel receiver for receiving channel allocation information from the base station;

25 a downlink control channel receiver for receiving power control information transmitted from the base station, a channel for the downlink control channel receiver being designated by the channel allocation information received from the third common channel receiver; and

30 a third uplink common channel transmitter for transmitting a message at a transmission power level determined by the power control information received by the downlink control receiver, a channel for the third uplink common channel transmitter being designated by the channel allocation information received from the third common channel receiver.



11. A channel communication apparatus of a base station in a CDMA communication system, the apparatus comprising:

5 a first uplink common channel receiver for detecting a preamble transmitted from a mobile station;

a downlink common channel transmitter for generating and transmitting a channel allocation message in response to the preamble detected by the first uplink common channel receiver;

10 a downlink control channel transmitter for transmitting power control information used to control transmission power of the mobile station, a channel for the downlink control channel transmitter being designated by the channel allocation message; and

15 a second uplink common channel receiver for receiving a message transmitted from the mobile station, a channel for the second uplink common channel receiver being designated by the channel allocation message.

20 12. The apparatus as claimed in claim 11, wherein the downlink common channel transmitter allocates a preamble acquisition signal and the channel allocation message to a specific slot by time dividing slots of a common channel.

13. The apparatus as claimed in claim 11, wherein the downlink common channel transmitter comprises:

25 a first common channel transmitter for generating and transmitting an acquisition indication signal when detecting the preamble; and

a second common channel transmitter for generating and transmitting channel allocation information corresponding to the acquisition indication signal when detecting the preamble.

30 14. The apparatus as claimed in claim 11, wherein the second uplink common channel receiver has a structure corresponding to a structure of the downlink control channel transmitter, the second uplink common channel receiver being correspondingly allocated when the downlink control channel transmitter is allocated.

15. The apparatus as claimed in claim 11, wherein the second uplink common channel receiver is allocated by mapping channels using the function of a signature for a preamble and the slot number of channels.

5

16. A channel communication apparatus of a mobile station in a CDMA communication system, the apparatus comprising:

a first uplink common channel receiver for detecting an AP transmitted from a base station and used to access a base station;

10 a first common channel transmitter for generating and transmitting a first response signal to the mobile station when receiving the AP;

a second common channel receiver for receiving a CD\_P transmitted from the mobile station through the first response signal;

15 a second common channel transmitter for generating and transmitting a second response signal when detecting the CD\_P;

a third common channel transmitter for generating and transmitting channel allocation information to the mobile station after generation of the second response signal by the second common channel transmitter;

20 a third uplink common channel receiver for receiving a message received over a common channel designated by the channel allocation information; and

a downlink control channel receiver for transmitting power control information used to control transmission power of the mobile station by measuring a signal strength of the third uplink common channel receiver, a channel for the downlink control channel receiver being designated by the channel allocation  
25 information.

17. A channel communication method of a mobile station in a CDMA communication system, the method comprises the steps of:

transmitting a preamble used for accessing a base station;

30 allocating in response to the preamble a control channel receiver for receiving channel allocation information and power control information transmitted from the base station, and an uplink common channel transmitter for transmitting a message; and

transmitting a message through the uplink common channel transmitter, and  
controlling transmission power of the uplink common channel transmitter  
according to the power control information received from the control channel  
receiver.

5

18. A channel communication method of a mobile station in a CDMA  
communication system, the method comprises the steps of:

transmitting an AP used for accessing a base station;

transmitting a CD\_P when detecting a first response signal for the AP  
10 transmitted from the base station;

allocating a downlink control channel for receiving power control  
information and an uplink common channel for transmitting a message by receiving  
successively-received channel allocation information, when detecting a response  
signal for the CD\_P transmitted from the base station; and

15 transmitting a message through the allocated uplink common channel, and  
controlling transmission power of the uplink common channel according to power  
control information received through the downlink control channel.

19. A channel communication method of a base station in a CDMA  
20 communication system, the method comprises the steps of:

when detecting a preamble transmitted from a mobile station, generating  
and transmitting a channel allocation message in response to the preamble;

based on the channel allocation message, allocating a downlink control  
channel for transmitting power control information for controlling transmission  
25 power of the mobile station and an uplink common channel for receiving a message  
transmitted from the mobile station; and

receiving a message transmitted over the uplink common channel,  
generating power control information by measuring a signal of the mobile station  
and transmitting the generated power control information over the downlink control  
30 channel.

20. A channel communication method of a base station in a CDMA  
communication system, the method comprises the steps of:

when receiving an AP through which a mobile station accesses a base station, generating and transmitting a first response signal for the AP;

when receiving a CD\_P transmitted from the mobile station, generating and transmitting channel allocation information and a response signal for the CD\_P;

5 allocating a downlink control channel for transmitting power control information according to the channel allocation information and an uplink common channel for receiving a message; and

receiving a message transmitted over the uplink common channel, generating power control information by measuring a signal of the mobile station  
10 and transmitting the generated power control information over the downlink control channel.

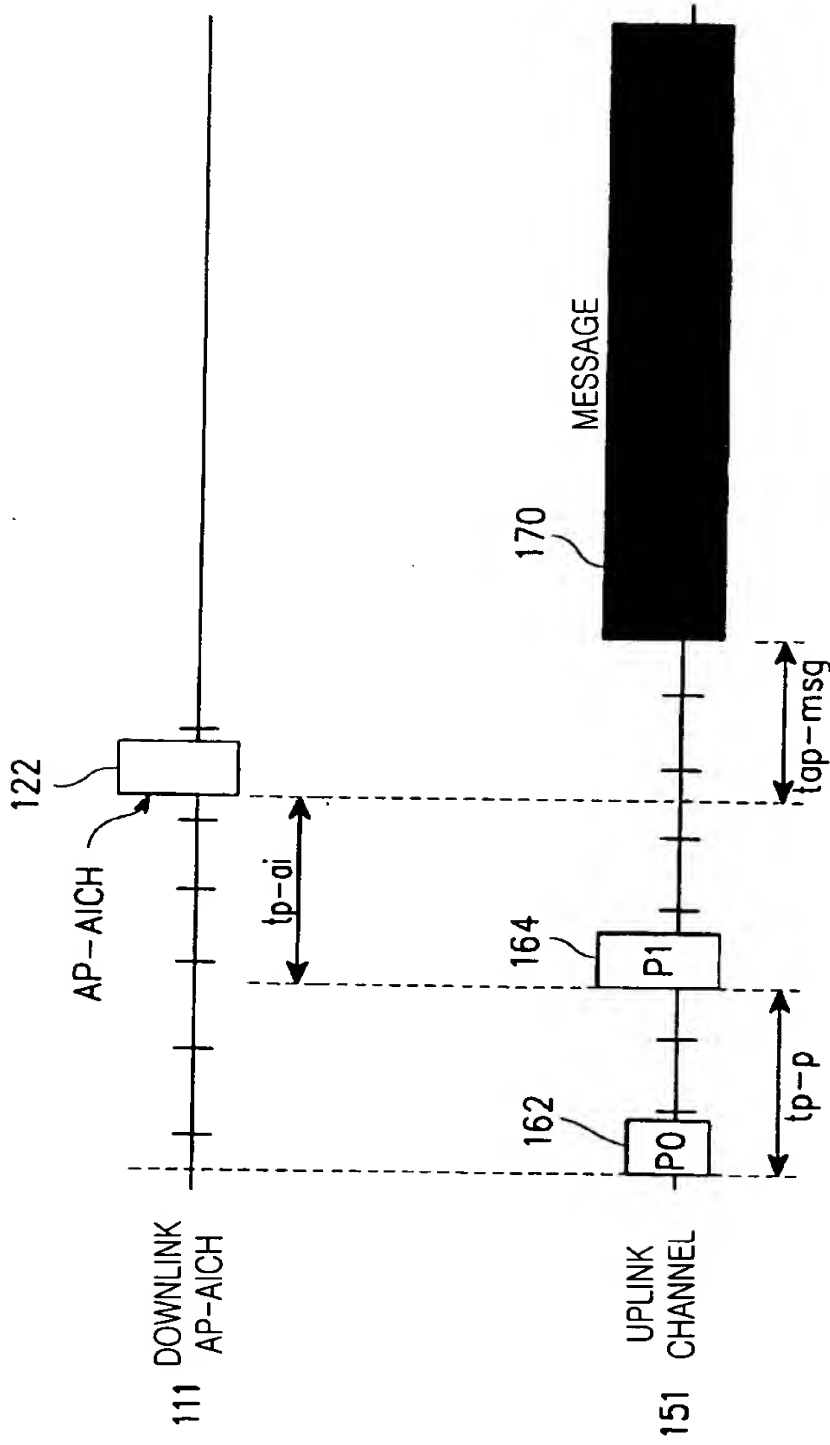


FIG.1

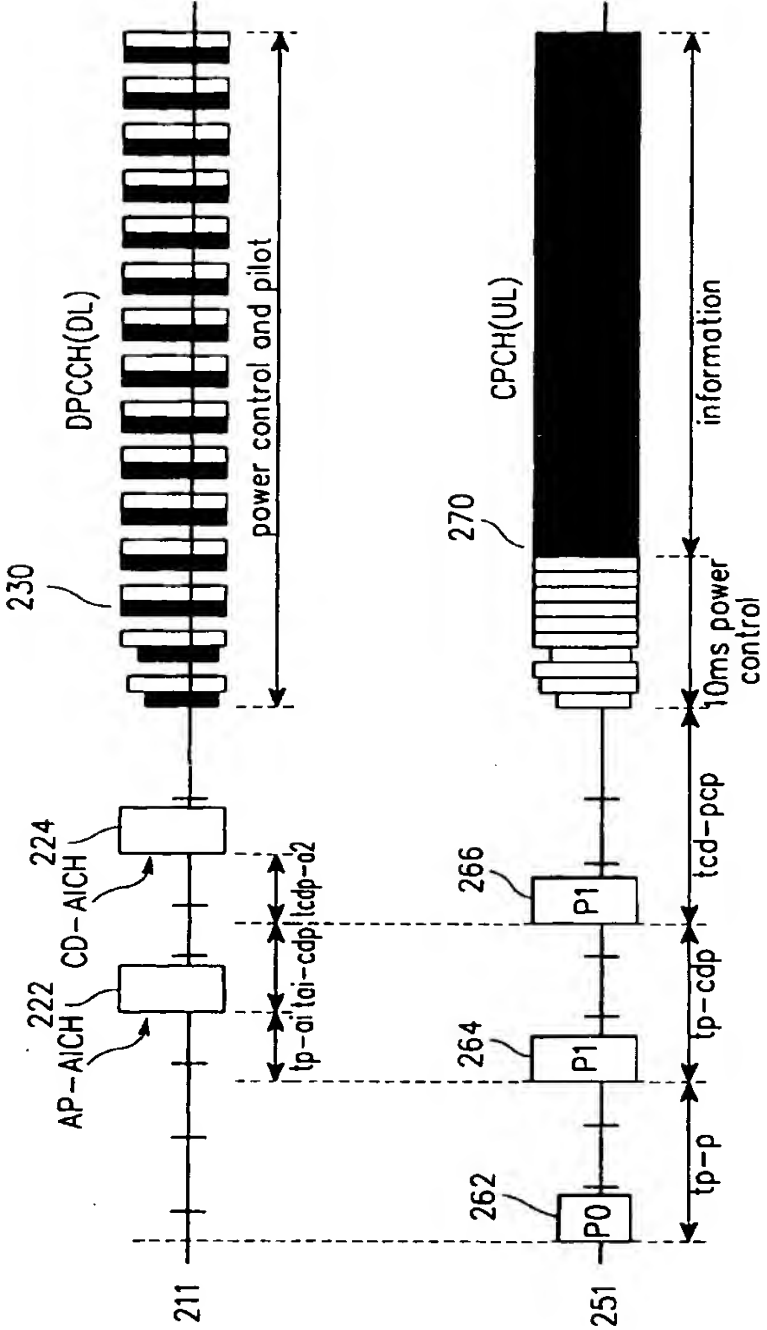


FIG.2


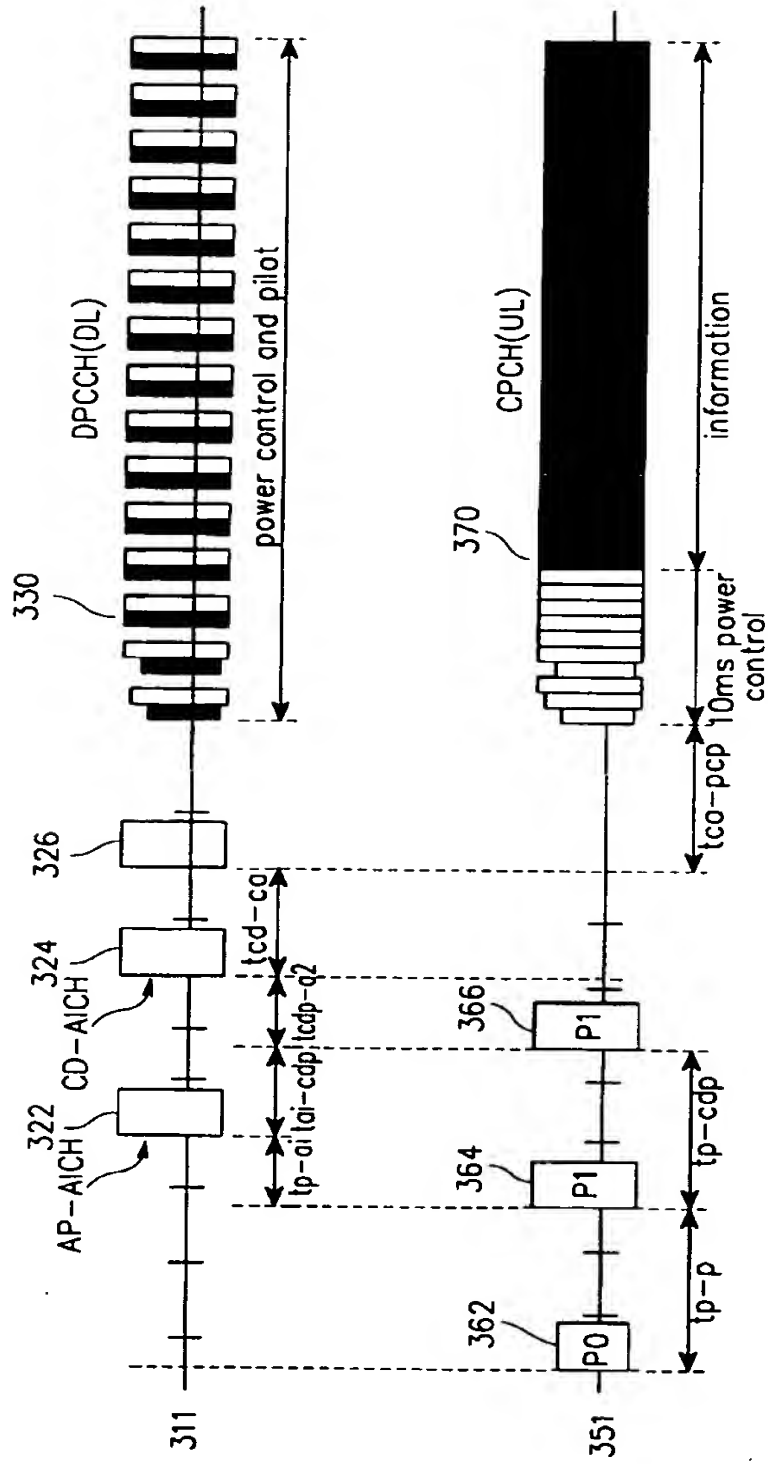


FIG.3



4/13

$S_0\overline{C}_0$	$S_1\overline{C}_1$	$S_2\overline{C}_2$	$S_3\overline{C}_3$	$S_4\overline{C}_4$	$S_5\overline{C}_5$	$S_6\overline{C}_6$	$S_7\overline{C}_7$	$S_8\overline{C}_8$	$S_9\overline{C}_9$	$S_{10}\overline{C}_{10}$	$S_{11}\overline{C}_{11}$	$S_{12}\overline{C}_{12}$	$S_{13}\overline{C}_{13}$	$S_{14}\overline{C}_{14}$	$S_{15}\overline{C}_{15}$
---------------------	---------------------	---------------------	---------------------	---------------------	---------------------	---------------------	---------------------	---------------------	---------------------	---------------------------	---------------------------	---------------------------	---------------------------	---------------------------	---------------------------

FIG.4



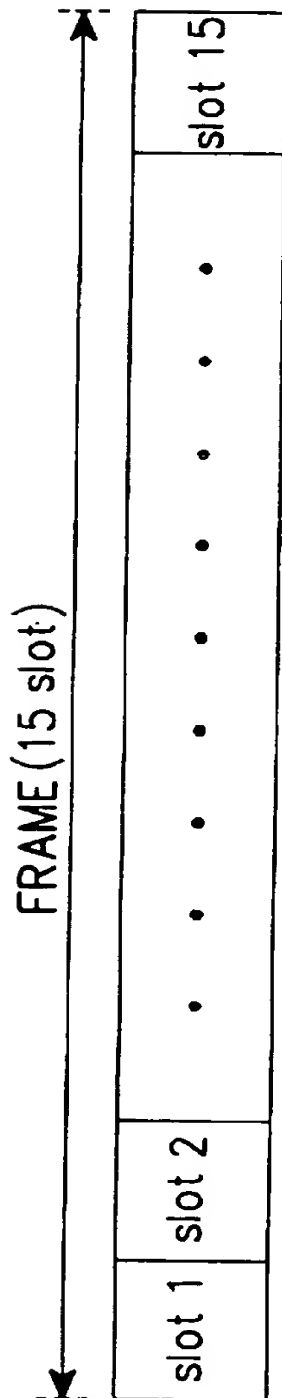


FIG.5A

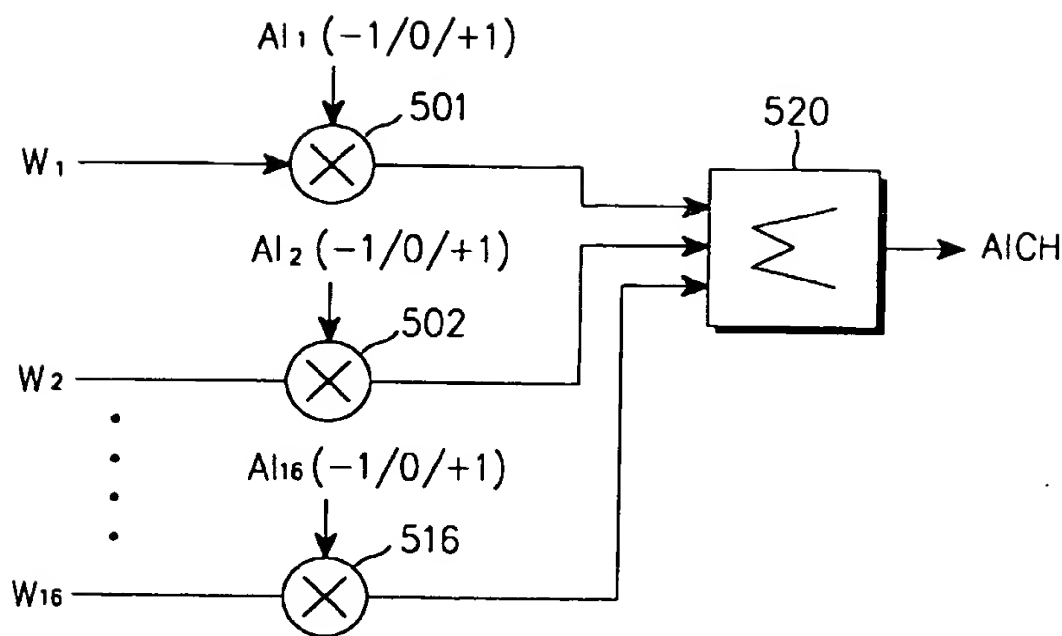


FIG.5B

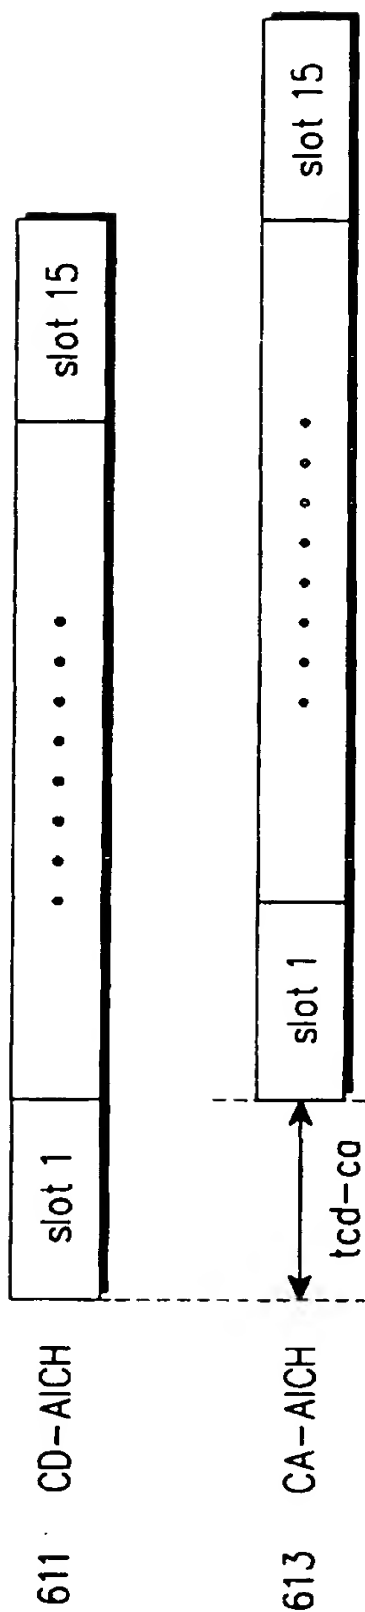


FIG.6A

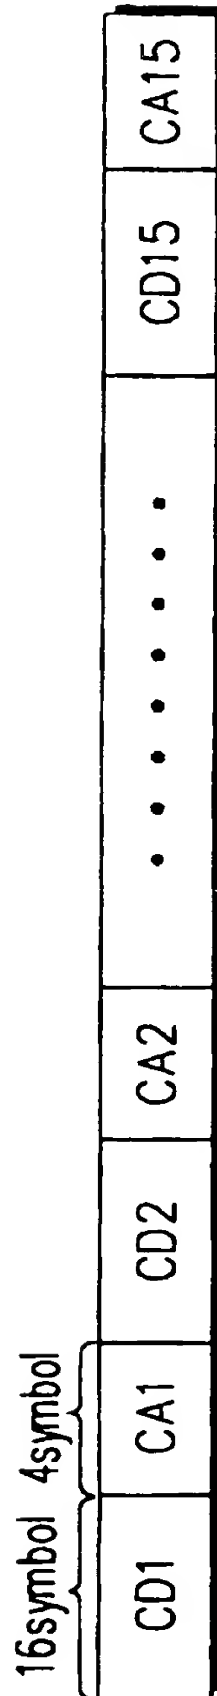


FIG.6B

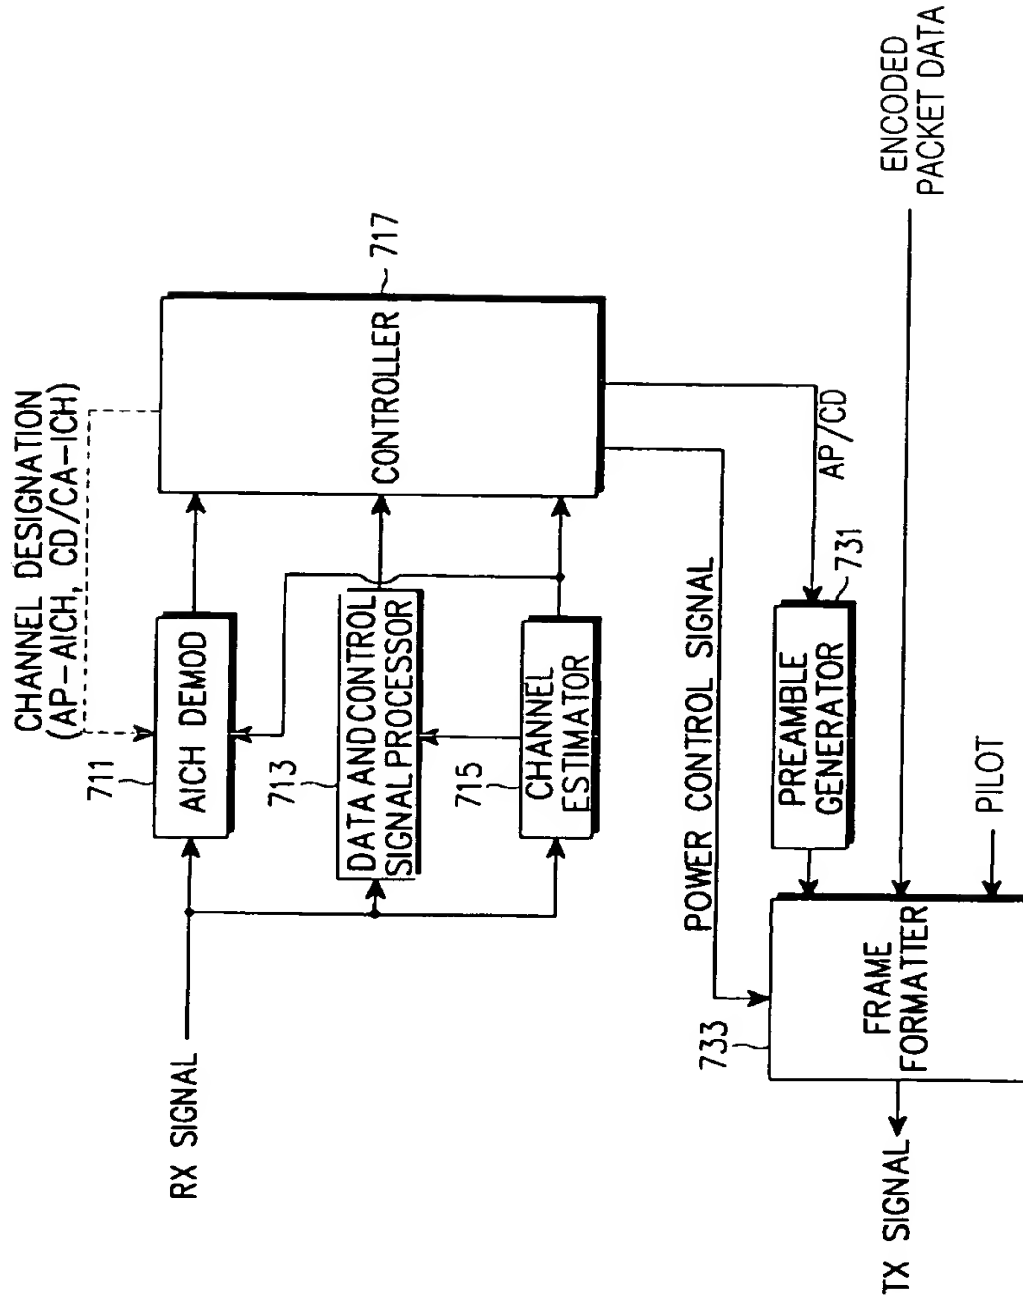


FIG. 7

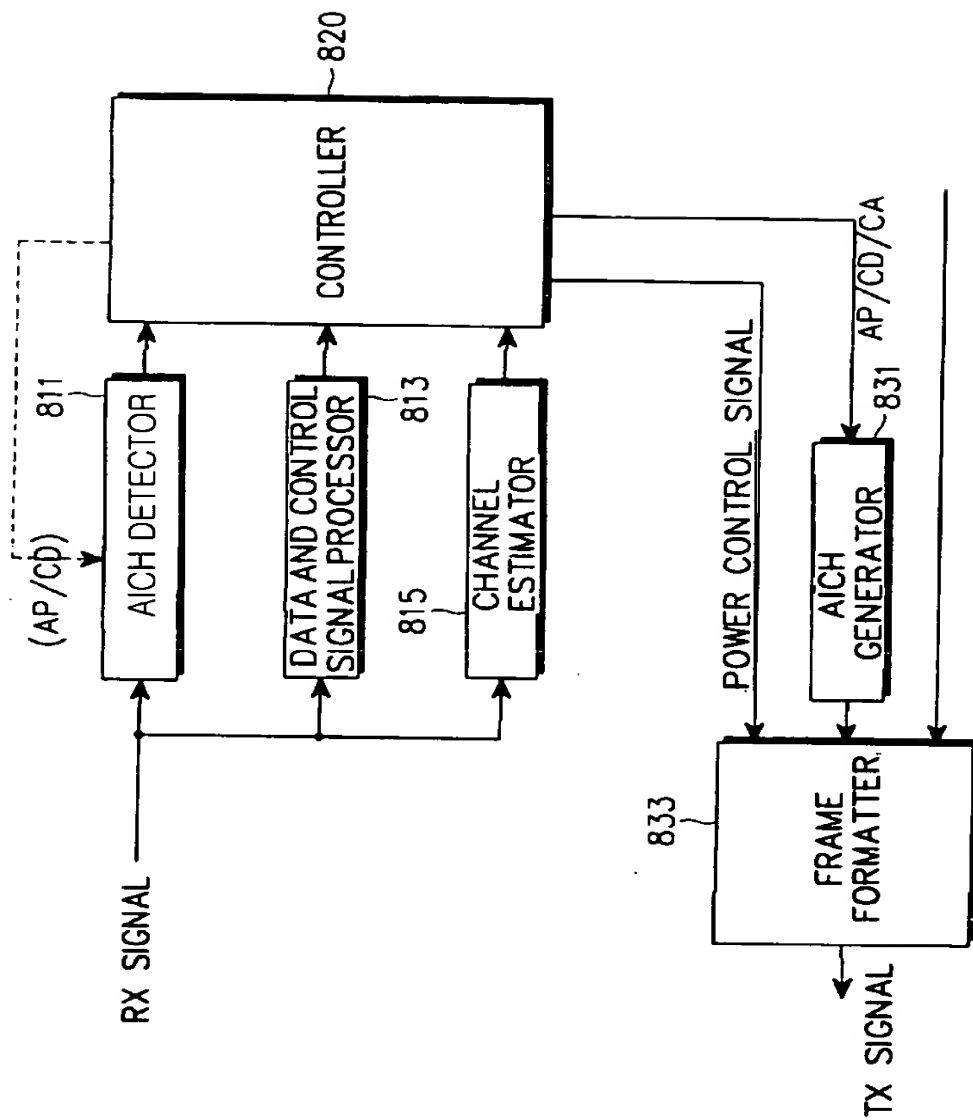


FIG.8



11/13

		CHANNEL ALLOCATION CA-AICH	
911 IF CD-AICH IS MULTIPLIED BY 1	DOWNLINK CONTROL CHANNEL 1	0000	(0)
	DOWNLINK CONTROL CHANNEL 2	0011	(1)
	DOWNLINK CONTROL CHANNEL 3	0101	(2)
	DOWNLINK CONTROL CHANNEL 4	0110	(3)

		CHANNEL ALLOCATION CA-AICH	
913 IF CD-AICH IS MULTIPLIED BY -1	DOWNLINK CONTROL CHANNEL 5	0000	(0)
	DOWNLINK CONTROL CHANNEL 6	0011	(1)
	DOWNLINK CONTROL CHANNEL 7	0101	(2)
	DOWNLINK CONTROL CHANNEL 8	0110	(3)

FIG.9

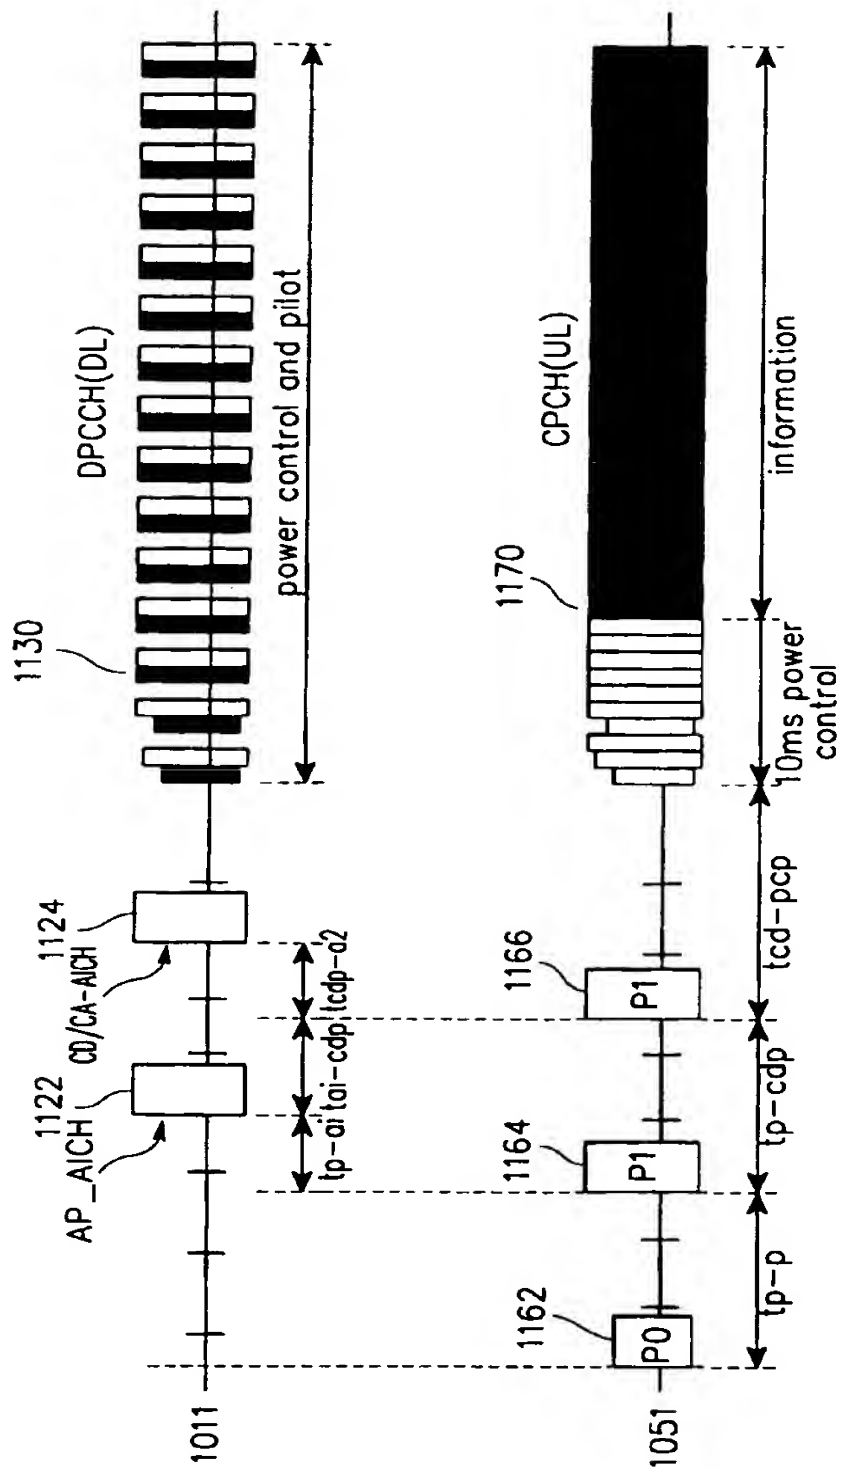


FIG.10





13/13

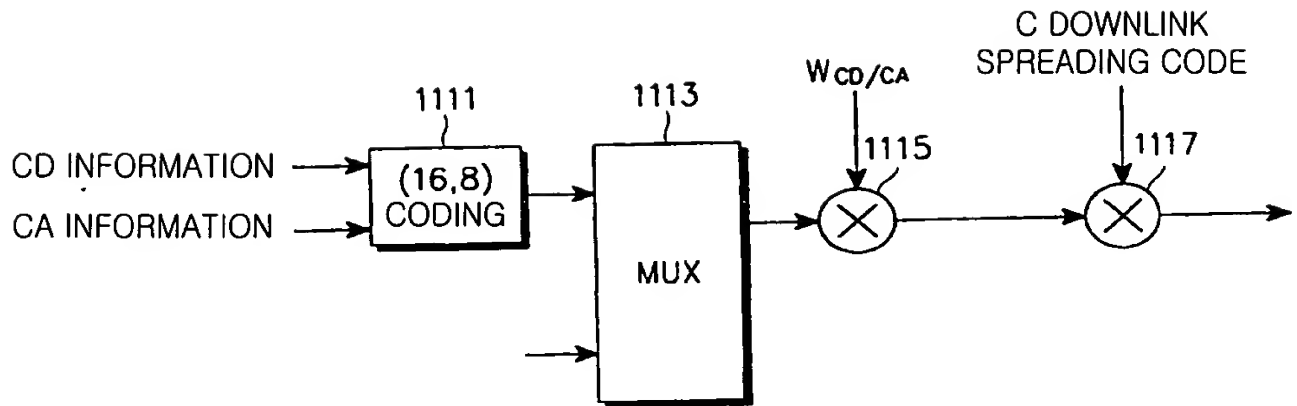


FIG.11